




**burak**  
alüminyum

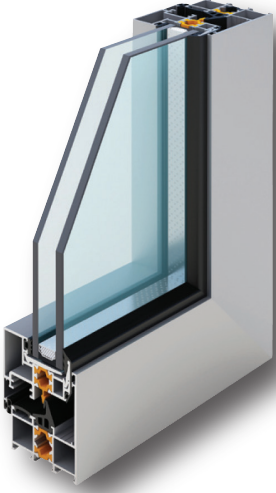

# BM 60

## YALITIMLI

### MENTEŞELİ SİSTEM

#### **TEKNİK ÖZELLİKLER**

TECHNICAL PROPERTIES

<b>KASA DERİNLİĞİ / FRAME DEPTH :</b>	<b>60 mm</b>
<b>KANAT DERİNLİĞİ / SASH DEPTH :</b>	<b>68 mm</b>
<b>PROFİL ET KALINLIĞI / PROFILE WALL THICKNESS :</b>	<b>1,6 mm - 2 mm</b>
<b>MAX. CAM KALINLIĞI / MAX GLASS THICKNESS :</b>	<b>44 mm</b>
<b>ISI BARIYERLERİ / INSULATION BARS :</b>	<b>16 mm</b>
<b>ISI YALITIM DEĞERİ (Uf) / THERMAL INSULATION VALUE (uF) :</b>	<b>2,27 W/m<sup>2</sup>K - 3,26 W/m<sup>2</sup>K</b>
<b>HAVA GEÇİRGENLİĞİ / AIR PERMEABILITY - (EN 12207) :</b>	<b>Class 4 (600 Pa)</b>
<b>SU SIZDIRMAZLIĞI / WATERTIGHTNESS - (EN 12208) :</b>	<b>Class E1500 (1500 Pa)</b>
<b>AKUSTİK PERFORMANS / ACOUSTICS - (EN 10140-2) :</b>	<b>37 (-1,9; -4,5) dB</b>

#### **KULLANIM SEÇENEKLERİ**

APPLICATION ALTERNATIVES

	<b>PENCERE WINDOW</b>	<b>KAPI DOOR</b>
<b>İÇE AÇILIR BİNİLİ / INWARD OPENNING STEP :</b>	●	●
<b>DIŞA AÇILIR BİNİLİ / OUTSIDE OPENNING STEP :</b>		●
<b>İÇE AÇILIR HEMYÜZ / INWARD OPENNING FLUSH :</b>		●
<b>DIŞA AÇILIR HEMYÜZ / OUTSIDE OPENNING FLUSH :</b>		●
<b>GİZLİ KANAT / HIDDEN VENT :</b>	●	●
<b>ÇİFT EKSEN / TILT &amp; TURN :</b>	●	●
<b>PARALEL / TILT &amp; SLIDE :</b>	●	●
<b>KATLANIR / FOLDING :</b>	●	